

PRODUCT OFFERING



**Connect
with Us!**



FOR GENERAL INQUIRIES & QUOTATIONS:

WWW.TOMORIPOWER.COM
JEREMY.GOERTZ@TOMORIPOWER.COM


PRODUCT OVERVIEW



POWER TRANSFORMERS



PAD MOUNT TRANSFORMERS

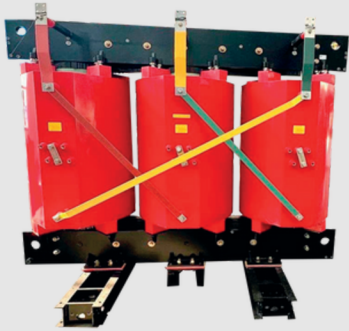

DRY-TYPE TRANSFORMERS



POLE MOUNT TRANSFORMERS



LV SWITCHBOARD



MV SWITCHGEAR



POWER TRANSFORMER



CUSTOMIZABLE



20-30 WEEKS LEAD TIME



CERTIFIED PER CSA SPE-1000




3 YEAR WARRANTY

CATEGORY	ITEM	DATA
General	Power Ratings (kVA)	3000kVA and above
	High Voltage	2.4kV and above
	Temperature Rise	65 C Rise
	Cooling	ONAN / ONAF / KNAN / KNAF
	Fluids	Mineral oil / Natural Ester / Synthetic Ester (FR3)
	Winding	Copper or Aluminum
	Standards	CSA C88:16 IEEE C57.12.28 (tamper-proof construction where required)
Optional Accessories	Dual Voltage	Upon Request
	NGR	
	Surge Arrestor	
	Load Break Switch	



PADMOUNT TRANSFORMER

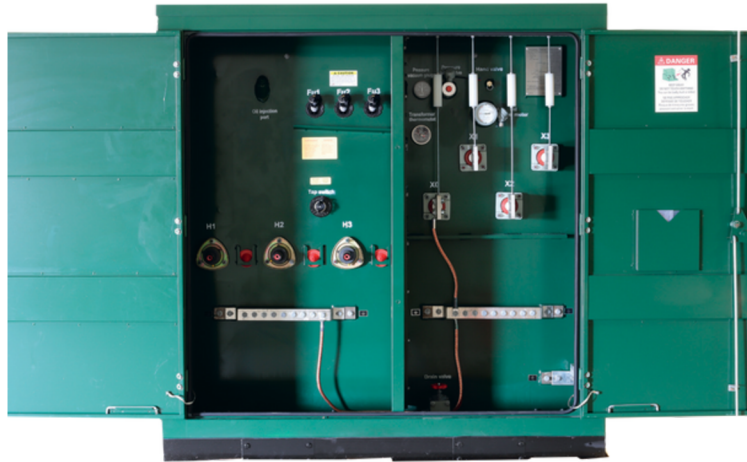

CUSTOMIZABLE



16 WEEKS LEAD TIME



UL LISTED



3 YEAR WARRANTY

CATEGORY	ITEM	DATA
General	Power Ratings (kVA)	75 / 150 / 225 / 300 / 500 / 750 / 1000 / 1500 / 2000 / 2500 / 3000 Greater Than 3000kVA is available
	High Voltage	Up to 34.5KV
	Low Voltage	600Y:347 / 480Y:277 / 208Y:120
	Impedance	5.75% Design Impedance
	Temperature Rise	65 C Rise
	Cooling	ONAN / KNAN
	Fluids	Mineral oil / Natural Ester / Synthetic Ester (FR3)
	Winding	Copper or Aluminum
	Feed	Radial or Loop
	Standards	CSAC227.4 CSAC227.3 CSA802.1-13
Optional Accessories	Dual Voltage	Upon Request
	NGR	
	Surge Arrestor	
	Load Break Switch	



DRY TYPE TRANSFORMER



LESS THAN 16
WEEKS LEAD TIME




3 YEAR WARRANTY



CUSTOMIZABLE



CERTIFIED PER
CSA SPE-1000

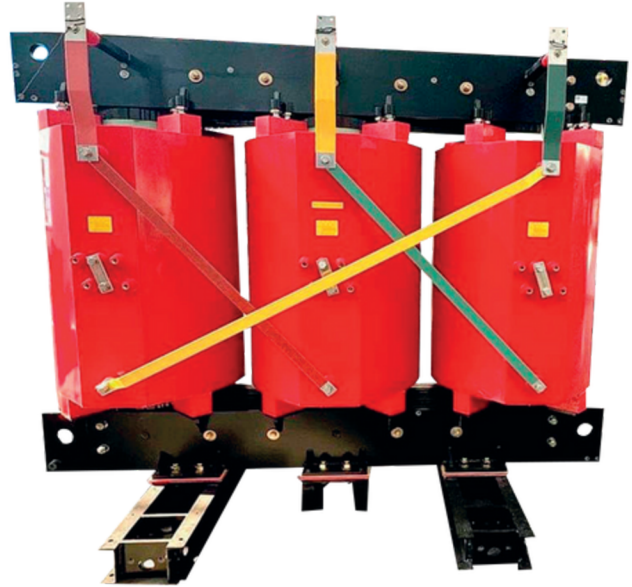

CATEGORY	ITEM	DATA
General	Power Ratings (kVA)	15kVA - 3,333kVA Single Phase 15kVA - 10,000kVA Three Phase
	High Voltage	Up to 46kV
	Low Voltage	600Y:347 / 480Y:277 / 208Y:120
	Impedance	5.75% Design Impedance
	Temperature Rise	65 C Rise
	Cooling	AN
	Winding	Copper or Aluminum
	Standards	CSA C22.2 No 47 CSA C9
Optional Accessories	Dual Voltage	Upon Request
	NGR	
	Surge Arrestor	
	Load Break Switch	



POLEMOUNT TRANSFORMER



LESS THAN 16
WEEKS LEAD TIME



3 YEAR WARRANTY



CERTIFIED PER
CSA SPE-1000



CATEGORY	ITEM	DATA
General	Power Ratings (kVA)	5 / 10 / 15 / 25 / 37.5 / 50 / 75 / 100 / 167
	High Voltage	Up to 34.5kV
	Low Voltage	4160Y:2400 / 600Y:347 / 480Y:277 / 208Y:120
	Impedance	5.75% Design Impedance
	Temperature Rise	65 C Rise
	Cooling	ONAN
	Winding	Copper or Aluminum
	Standards	CSA C2.1 CSA C2.2



LV SWITCHBOARD



LESS THAN 8
WEEKS LEAD TIME



3 YEAR WARRANTY



CSA SPE-1000-
FEILD INSPECTION



CATEGORY	ITEM	DATA
General	Amp Rating	5 / 10 / 15 / 25 / 37.5 / 50 / 75 / 100 / 167
	Voltage Rating	Up to 34.5kV
	Bus Bar Material	Copper or Aluminum
	Standards	CSA C22.2 No.40:17 CSA C22.2 No.76:14

KEY FEATURES:

- CORROSION RESISTANT
- PAINTED CARBON STEEL ENCLOSURE (OUTDOOR USE)
- PADMOUNT, FREESTANDING
- TAILORED MAIN & SECONDARY BREAKER DESIGN



MV SWITCHGEAR



8-10 WEEKS LEAD
TIME



3 YEAR WARRANTY



CSA SPE-1000-
FEILD INSPECTION



CATEGORY	ITEM	DATA
General	Amp Rating	Up to 4000A
	Voltage Rating	Up to 34.5kV
	Bus Bar Material	Copper or Aluminum
	Standards	CSA C22.2 No.31

KEY FEATURES:

- **CORROSION RESISTANT**
- **PAINTED CARBON STEEL ENCLOSURE (OUTDOOR USE)**
- **PADMOUNT, FREESTANDING**
- **TAILORED MAIN & SECONDARY BREAKER DESIGN**

